




**Make Life Easier
and Lead People
Healthier**

SFXB 雪霸®

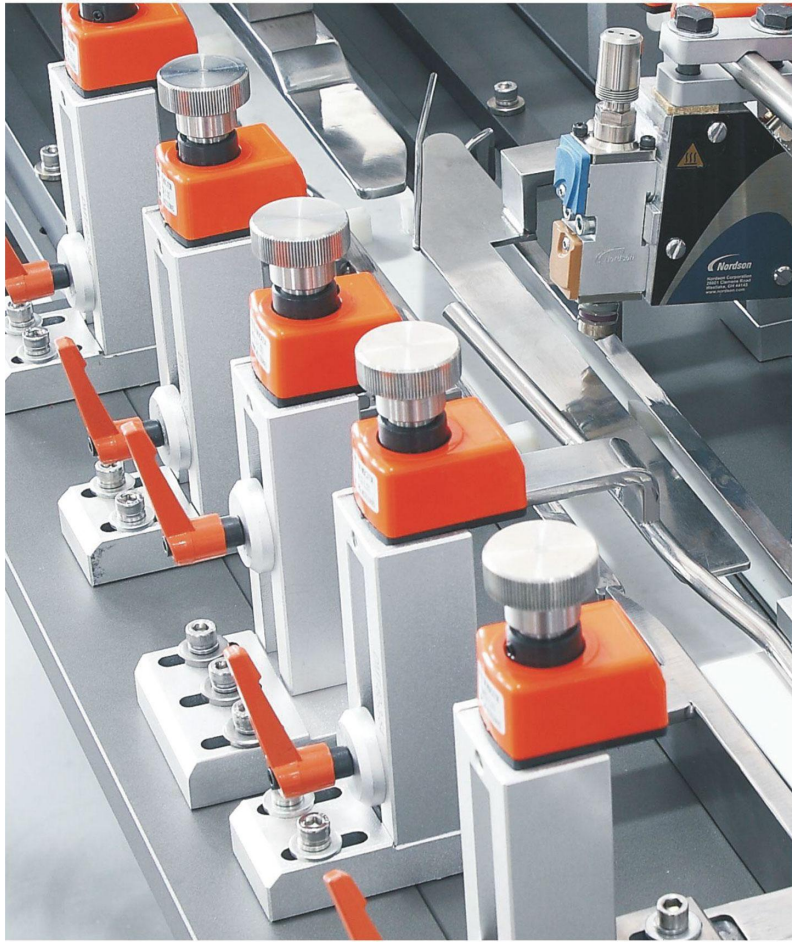

Professional
manufacturer
of packaging
machinery

包装机械专业制造商

“

关于我们 ABOUT US

”

广州雪霸专用设备有限公司座落于广州市南沙区大岗镇,2000年以来,为智能自动化灌装生产线开发生产积累了宝贵的经验,形成了企业独有的产品内涵;是国内为数不多专业从事非标自动化灌装生产线设备的专业企业,能够完成整线所有环节设备的开发生产,生产配套能力强;公司产品品种丰富,类型规格齐全;为调味品、酱料、饮料、保健品、制药、化妆品生产各种类型的配套生产线,已成为多各家知名企业的指定产品配套商;产品远销国内外。

本公司是一家专业研发和生产铝箔封口机,灌装机,自动灌装生产线,旋盖机,贴标机等的企业,是国内电磁感应铝箔封口机技术专业水平、产品品种齐全的制造商。

Guangzhou Xueba Special Equipment Co., Ltd. is located in Dagang Town, Nansha District, Guangzhou City. Since 2000, the company has accumulated valuable experience in the development and production of intelligent automated filling production lines, forming a unique product portfolio. As one of the few specialized enterprises in China dedicated to non-standard automated filling line equipment, we possess the capability to develop and manufacture all equipment required for complete production lines, supported by robust production and integration strengths. Our company offers a diverse range of products with comprehensive specifications, providing customized production line solutions for industries such as condiments, sauces, beverages, health products, pharmaceuticals, and cosmetics. We have become the designated supplier for numerous renowned enterprises, and our products are exported to both domestic and international markets.

As a professional manufacturer, we specialize in the R&D and production of aluminum foil sealing machines, filling machines, automated filling production lines, capping machines, and labeling machines. We are recognized as China's leading domestic manufacturer with the highest technical expertise and most comprehensive product portfolio in electromagnetic induction aluminum foil sealing technology.


01

OUR EXCELLENT
MACHINES
装盒机类

GDZ-130

Automatic Cartoning Machine

全自动装盒机

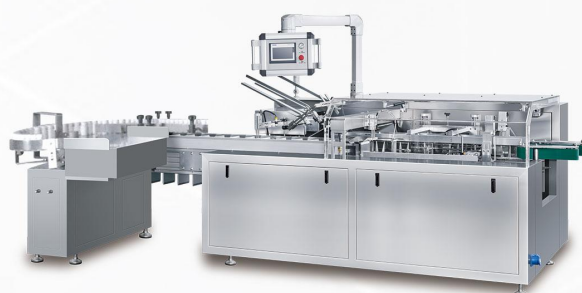

【GDZ-120P】



【GDZ-120P】

主要技术参数 / Main Technical Parameters

装盒速度 Cartoning speed		30-120 盒 / 分 cartons/min
纸盒 Carton	质量要求 Quality	250-350g/ m ² (视纸盒大小而定 depending on carton size)
	尺寸范围 Size	(70-200)mm×(35-120)mm×(14-70)mm
说明书 Leaflet	质量要求 Quality	60-70g/ m ²
	未折叠尺寸范围 Unfolded leaflet size	(80-250)mm×(90-170)mm
	折叠范围 Fold	(1-4) 折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6mpa
	耗气量 Air consumption	120-160L/min
电源 Power supply		380V 50HZ
主电机功率 Main motor power		1.5kw
外形尺寸 Overall dimensions	GDZ-130	2650mm×1300mm×1900mm
	GDZ-130D	4300mm×1300mm×1900mm
	GDZ-130E	5500mm×1300mm×1900mm
	GDZ-130P	4300mm×1300mm×1900mm

GDZ-260

Automatic High Speed Cartoning Machine 全高速自动装盒机

概述 / Applications

GDZ-260型全自动高速装盒机系在引进国外先进技术的基础上自行创新设计的机型，并严格按医药行业“GMP”要求制造。具有高效率、高性能的生产能力，说明书折叠及传送、纸盒成形、后部推料机构相关技术达到欧美标准。简洁式的外观设计和后部连续式推料的结构使操作、维护更加简便。四等分双行星轮旋转式向外开盒并具有两次预形成装置确保纸盒的完全撑开成形。

该机是款全自动连续式高速装盒机，集机、光、电、气一体化的高性能产品，可与其它配套形成包装生产线。



GDZ-260 automatic high speed cartoning machine is new model with innovation design base on bringing in foreign advanced technology, also strictly according to pharmaceutical industry "GMP" standard to manufacture. With high efficiency, high performance production capacity. Leaflet folding and conveying, carton opening and forming, posterior pushing structure and related technology all reach Europe and USA standards; Appearance simple design and posterior continuous pushing structure make operation and maintenance more convenient; four equidouble row star wheel rotation type outward opening carton and under twice pre-forming device to ensure that carton open and form completely.



主要技术参数 / Main Technical Parameters

装盒速度 Cartoning speed		260 盒 / 分 (Cartons/min)
纸盒 Carton	质量要求 Quality	250-350g/ m ² (视纸盒大小而定 Depending on carton size)
	尺寸范围 Size	(70-180)mm×(35-80)mm×(14-50)mm
说明书 Leaflet	质量要求 Quality	60-70g/ m ²
	未折叠尺寸范围 Unfolded leaflet size	(80-250)mm×(90-170)mm
	折叠范围 Fold	(1-4) 折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6mpa
	耗气量 Air consumption	120-160L/min
电源 Power supply		380V 50HZ
主电机功率 Main motor power		1.5kw
外形尺寸 Overall dimensions		2650mm×1300mm×1900mm
整机净重 Machine weight		3000kg

DJ-50D型

Multifunctional Vertical Box Filling Machine

多功能大规格全自动装盒机

概述 / Applications

汽车灯泡，LED球泡灯，开关插座，滤清器，散装小零食，502胶水，无托口服液，有内衬化妆品，制药行业，食品行业，化妆品行业，电子行业纸盒立式自动成型包装。

Round bottled medicine, food-stuff, cosmetic, etc. packing into square box.

■该机专为包装纸盒尺寸多批量小的厂家独立设计。

■成本低，占地面积小。适用于各种尺寸的盒子。

该机是一种具有多功能的垂直型自动装盒机，更换规格换模具时间短。

■采用304不锈钢外壳

■先进的PLC控制系统结合彩色触摸屏控制面板

可以轻松地设置和改变包装参数。

■It is specially design to pack small quantities multi size box.

■With low cost and only require small area. It is suitable for various sizes of box. The machine is a vertical type with multiple function and require a short time to change mould.

■304 stainless steel case

■Advanced PLC Control System Combined with Colorful Touch Screen Control Panel , can easily set and change the packing parameters.



主要技术参数 / Main Technical Parameters

包装速度 Packing speed	20-50 盒 / 分钟 box per min
纸盒尺寸范围 Size range of carton	L(20-120)mm×W(20-120)mm×H(45-280)mm
纸盒纸质要求 Paper quality of carton	250-350g/m ³
电机功率 Motor power	1/4HP 15:1 1.5KW/H
电源类型 Power supply type	单相 220V 50/60HZ single phase
机器噪音 Machine noise	≤80dB
气源 Air supply	0.5-0.8 Mpa
耗气量 Air Consumption	260L/min
外形尺寸 Overall dimension	L 1100 x W 1500 x H 1700 mm
重量 Weight	450Kg

DJ-190型

Multifunctional Automatic Large-sized Cartoning Machine 多功能大规格全自动装盒机

概述 / Applications

DJ-190型多功能大规格全自动装盒机系在引进国外先进技术的基础上自行创新设计的机型，并严格按医药行业“GMP”要求制造。具有高效率、高性能的生产能力，说明书折叠及传送、纸盒成形、后部推料机构相关技术达到欧美标准:简洁式的外观设计和后部连续式推料的结构使操作、维护更加简便:四等分双行星轮旋转式向外开盒并具在两次预形成装置确保纸盒的完全撑开成形。

该机是款全自动连续式高速装盒机，集机、光、电、气一体化的高性能产品，可与其它配套形成包装生产线。

GDZ-260 automatic high speed cartoning machine is new model with innovation design base on bringing in foreign advanced technology, also strictly according to pharmaceutical industry "GMP" standard to manufacture. With high efficiency, high performance production capacity. Leaflet folding and conveying, carton opening and forming, posterior pushing structure and related technology all reach Europe and USA standards; Appearance simple design and posterior continuous pushing structure make operation and maintenance more convenient; four equadouble row star wheel rotation type outward opening carton and under twice pre-forming device to ensure that carton open and form completely.



主要技术参数 / Main Technical Parameters

装盒速度 Cartoning speed		30-100 盒 / 分钟 boxes/minute
纸盒 Carton	质量要求 Quality	300-400g/m ² (视纸盒大小而定 Depending on carton size)
	尺寸范围 Size	L (100-300) mm × W (40-190) mm × H (30-80) mm
电源 Power supply		三相四线 380V 50Hz Three-phase four-wire 380V 50Hz
主电机功率 Main motor power		2.1KW
外形尺寸 Overall dimensions		L3700 × W2200 × H1800 mm
整机净重 Machine weight		1600Kg

DJ-120型

Multifunctional Automatic Large-sized Cartoning Machine

多功能全自动装盒机

概述 / Applications

多功能全自动装盒机是一款高效、灵活的包装设备，专为满足现代生产线上对产品包装速度与精度的要求而设计。该机型能够自动完成从纸盒开盒、产品装填到封盒的一系列操作，极大地提高了生产效率并减少了人工成本。它适用于各种行业，如制药、食品、化妆品等，可处理不同尺寸和形状的产品。

The multifunctional fully automatic cartoning machine is a highly efficient and flexible packaging equipment designed to meet the demands of speed and precision in modern production lines. This model can automatically complete a series of operations from opening cardboard boxes, filling products, to sealing the boxes, significantly improving production efficiency and reducing labor costs. It is suitable for various industries such as pharmaceuticals, food, cosmetics, etc., capable of handling products of different sizes and shapes.

- 多功能全自动装盒机具备以下特点：
- 高速度：每分钟可处理30至120个盒子，具体取决于型号。
 - 高灵活性：支持多种规格的纸盒调整，适应不同产品的包装需求。
 - 智能化控制：采用先进的PLC控制系统，确保操作简便且易于维护。
 - 稳定性能：机器运行噪音低，稳定性好，保证了长时间连续工作的可靠性。
 - 节能环保：优化的气动系统和电机功率配置，实现节能环保。
- Key features of the multifunctional fully automatic cartoning machine include:
- High Speed: Capable of processing 30 to 120 boxes per minute depending on the model.
 - High Flexibility: Supports adjustments for various box specifications to meet different packaging requirements.
 - Intelligent Control: Equipped with advanced PLC control systems ensuring simple operation and easy maintenance.
 - Stable Performance: Operates with low noise and high stability, guaranteeing reliability during prolonged continuous operation.
 - Environmentally Friendly and Energy-saving: Optimized pneumatic system and motor power configuration achieve energy saving and environmental protection.



主要技术参数 / Main Technical Parameters

包装速度 Packing speed	30-120 盒 / 分钟 boxes/minute
纸盒尺寸范围 Size range of carton	L (60-200) mm × W (20-80) mm × H (15-60) mm
纸盒纸质要求 Paper quality of carton	250-300g/m ³
说明书尺寸范围 Size range of use instructions	L (100-260) mm × W (100-190) mm
说明书纸质要求 Paper quality of use instructions	55-70 g/m ³
电机功率 Motor power	1.5KW
电源类型 Power supply type	三相四线 380V 50Hz Three-phase four-wire 380V 50Hz
机器噪音 Machine noise	≤80dB
气源 Air supply	0.5-0.7 Mpa
耗气量 Air Consumption	120-160L/min
外形尺寸 Overall dimension	主机部分 L3100 × W1200 × H1900 mm 理瓶部分 L1800 × W900 × H1000 mm
重量 Weight	1200Kg

GD-PM600

Full automatic high-speed packing machine

全自动高速装箱一体机

02

OUR AWESOME
MACHINES
装箱机类

概述 / Applications

- 该机具有自动开箱、放上和放下箱垫、装箱、放装箱单、封箱等功能
- 该机具有数据传输接口，可记录关键数据和需求并可按其需求进行导出
- 开箱过程出现异常（如开箱不到位、纸箱卡机等）具有报警提示。
- 吸箱缺物料检测功能；
- 压缩空气低压报警停机功能
- 胶带缺料报警停机功能；

- The machine has the functions of automatic unpacking, putting on and down the box pad, packing, putting in the packing list, sealing and so on;
- The machine has a data transmission interface, which can record key data and requirements and export them according to their requirements.
- In case of any abnormality during unpacking (such as improper unpacking, carton jam, etc.), there is an alarm prompt.
- The suction box lacks material detection function;
- Compressed air low pressure alarm shutdown function;
- Tape shortage alarm shutdown function;



主要技术参数 / Main Technical Parameters

设计最大生产能 Design maximum production capacity	480 箱 / 小时 Box/Hour
实际生产能力 Actual production capacity	4-8 箱 / 分钟 (Box/min) 视装箱层数而定 (It depends on the number of packing layers)
纸箱尺寸：最小 Carton Size: Min. value	250x150x150mm
纸箱尺寸：最大 Carton Size: Max. value	550x400x400mm
被包装物尺寸：最小值 Package size: Min. value	具体物体 (Concrete object)
被包装物尺寸：最大值 Package size: Max. value	520x370x370mm
进料高度 Feed height	950 ± 50mm
电源功率 Power supplymption	AC380/ 三相 /50Hz 6.5kw
气压 Pressure	0.6MPa
耗气量 Air Consumption	小于 1 立方米 / 小时 (Gas consumption: less than 1 m³/h)
外形尺寸 Overall dimension	4970mmx2300mmx2900mm
重量 Weight	1500kg

GDZ-120

Automatic Cartoning Machine

全自动装盒机


03

OUR AWESOME
MACHINES
装盒机类

概述 / Applications

- PLC自动控制系统变频调速电器元件均采用国际知名品牌。
- 采用人机界面操作系统。
- 机械过载自动停机。

- International famous brand of electrical component such as PLC touch screen frequency inverters, etc.
- Adopt human-machine operation system.
- Automatically stop when machine is overload.

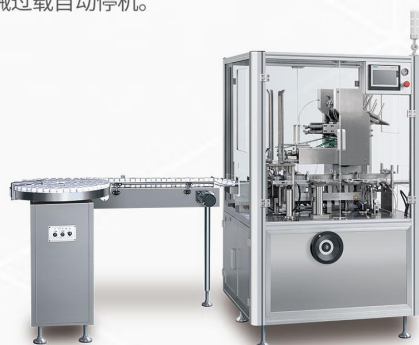

【GDZ-120P】



【GDZ-120D】



主要技术参数 / Main Technical Parameters

装盒速度 Cartoning speed		30-100 盒 / 分 cartons/min
纸盒 Carton	质量要求 Quality	250-350g/ n ² (视纸盒大小而定 depending on carton size)
	尺寸范围 Size	(65-155)mm×(30-85)mm×(14-50)mm
说明书 Leaflet	质量要求 Quality	60-70g/ n ²
	未折叠尺寸范围 Unfolded leaflet size	(80-250)mm×(90-170)mm
	折叠范围 Fold	(1-4) 折 (Fold)
压缩空气 Compressed air	工作压力 Working pressure	≥0.6mpa
	耗气量 Air consumption	120-160L/min 200-240L/min(GDZ-120D)
电源 Power supply		380V 50HZ
主电机功率 Main motor power		0.75kw
外形尺寸 Overall dimensions	GDZ-120	1200mm×990mm×1700mm
	GDZ-120D	2880mm×1140mm×1800mm
	GDZ-120G	2300mm×1140mm×1800mm
	GDZ-120P	2300mm×1140mm×1800mm